



Clamp On Type- Small Pipe Size Solution
F6 Ultrasonic Flow Meter

Clamp On Type Ultrasonic Flowmeter DUS-F6









PRISMA
Instruments

Product Features

- Easily and friendly for installation and operation. It only takes a few minutes, from the start of installation to using the flow meter.
- F6 adopts a new external clamp design, which could get the flow rate without touch the measurement medium. Compared with other traditional flow meter, this could avoid pressure loss or media contamination problems.
- As the advantage of a clamp on flow meter, no need to cut off the pipe or long time stop the equipment, save the cost of time and labor costs.
- A variety of modes are available for setting and flexibility. One set is universal for all pipe size in the measuring range, and suitable for many kinds of metal and resin pipes.
- 8 LCD display. Display a variety of information.
- It is optional to become an ultrasonic cooling (heat) meter/ btu meter/ energy meter to realize the monitoring and measurement of energy.




Applicable for various liquids and compatible with various pipeline materials and sizes:

1 Applicable fluid	 Water	 Oil	 Chemical		
2 Compatible piping material	Metal pipe Stainless steel,Carbon steel , Copper			Resin pipe PVC, Other	
	 Stainless steel	 Carbon steel	 Copper	 PVC	 Other
3 Compatible pipe line size	DN15~DN40 (Inner diameter 12mm~ Inner diameter 40mm)				

Clamp On Type Ultrasonic Flowmeter DUS-F6

Provide many aspects of help for different flow measurement application requirements:

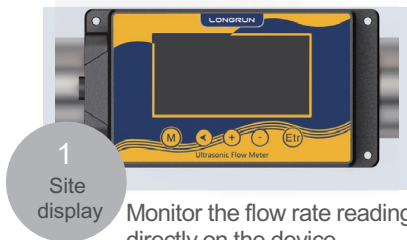


1
Site
display

Monitor the flow rate reading directly on the device.



2
Remote
monitoring

With the help of output, could send the information to PLC, central control room and etc.

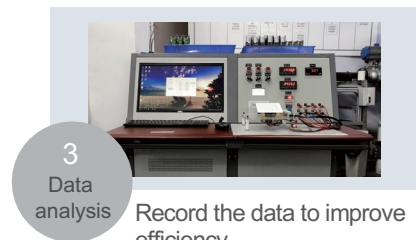

3
Data
analysis






Record the data to improve efficiency.

Specification

Pipe material	Metal /PVC, PP or PVDF rigid plastic pipe
Liquid type	Water/other liquid (Single liquid medium without solid particles or impurities)
Temperature range	0-75°C (No freezing on the surface)
Low velocity cut off value (Default by factory)	0.1m/s
Display	256*128, LCD
Response time	0.5~60s
Accuracy	±2%, (±1% after calibration)
Data Storage period	300ms
Memory for data backup	EEPROM (Data storage: over 10 years, data read/write frequency: over 1 million times)
Power and I/O connection	M12 type aviation plug
Output	4-20mA
Communication	Modbus RS485
(Options for output)	OCT (pulse output)/ One relay alarm (please contact the factory)
Power supply	10-24V VDC
Electric power	< 3W
Protective circuit	Power reverse connection protection, Power surge protection,
	Output short circuit protection, Output surge protection
Enclosure protection class	IP65
Environment temperature	-10 to 60°C (No freezing)
Relative humidity	35 to 85% RH (No condensation)
Vibration resistance	10 to 55 Hz
	double amplitude 1.5 mm, 2 hours in each XYZ axis
Impact resistant	100 m/s ² 16 ms pulse, 1000 times each for X, Y and Z axis
Main material	Aluminum, Industrial Plastics
cable length	2m(standard), PT1000 sensor standard cable length is 9m



Clamp On Type Ultrasonic Flowmeter DUS-F6

Flow Range


Pipe size (DN)	Upper flow value (L/min)	
15	60 L/m	
20	100 L/m	
25	200 L/m	
32	300 L/m	
40	400 L/m	

Notice: The minimum measurable pipe size is the inner diameter ≥ 12 mm

Size Drawing (Unit: mm)

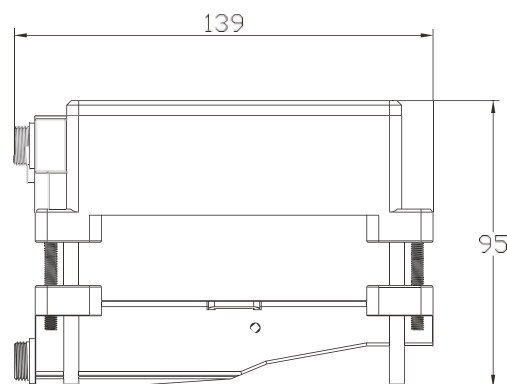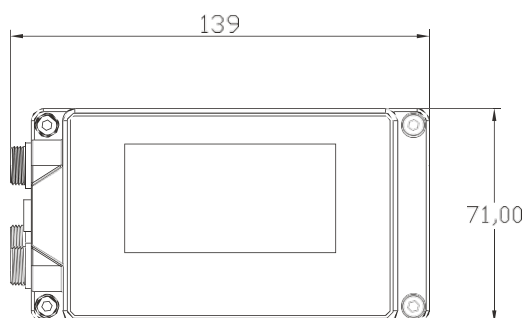

Ultrasonic energy /BTU meter

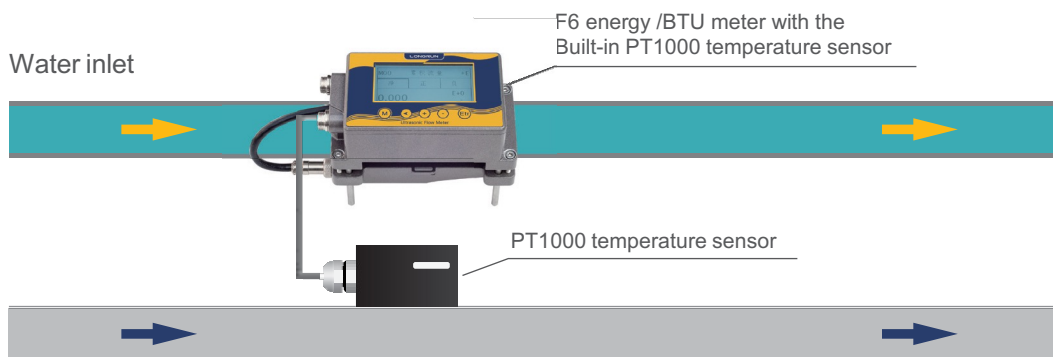

Clamp On Type Ultrasonic Flowmeter **DUS-F6**

PRISMA
Instruments

Application

